

## Air-/ air heat exchanger LT 5060-230V



### Product Description

<b>Order Number:</b>	506000011
<b>Colour:</b>	RAL 9018
<b>Protection category IP (IEC 60 529):</b>	External circuit: IP 24 Internal circuit: IP 54
<b>Add-ons:</b>	Stainless steel, part no. 5060002
<b>Approvals:</b>	CE
<b>Customs tariff number:</b>	84195000
<b>Material housing:</b>	Mild steel, powder coated

## Technical data LT 5060-230V

<b>Spec. heat exchanger performance:</b>	60 W/K
<b>Operating temperature range:</b>	-5°C - +55°C
<b>Max. air volume flow:</b>	Ambient air circuit 480 m <sup>3</sup> /h @ 50Hz / 500 m <sup>3</sup> /h @ 60Hz Cabinet air circuit 420 m <sup>3</sup> /h @ 50Hz / 450 m <sup>3</sup> /h @ 60Hz
<b>Mounting:</b>	External
<b>Dimensions (H x W x D):</b>	1,740 x 395 x 180 mm
<b>Weight:</b>	34 kg
<b>Cut out dimensions:</b>	2 x [223 x 223] mm
<b>Rated operating voltage / frequency:</b>	230V 50/60 Hz
<b>Rated current L35L35:</b>	1.8 A
<b>Max. current:</b>	4 A
<b>Power consumption:</b>	400 W
<b>Fuse rating:</b>	3 A (T)
<b>Connection:</b>	8 - pole terminal block


Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).


> [Overview product group Air-Air Heat Exchangers](#)

**Performance Graph:**

T = Temperature difference between ambient and internal temperature  
 P = heat exchanger performance

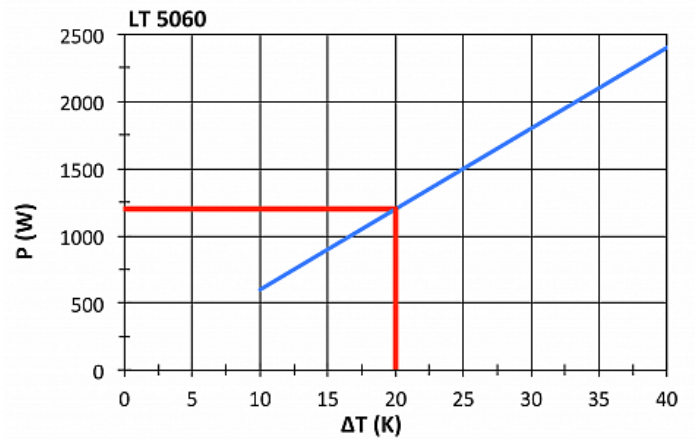

[click image to enlarge](#)

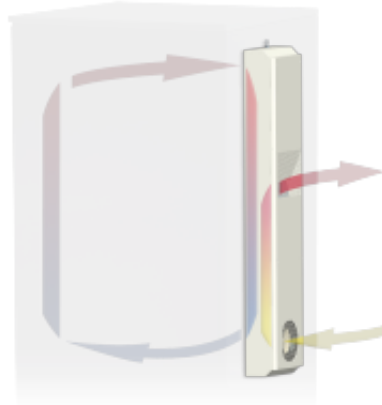**Airflow diagram:**


[click image to enlarge](#)

**Cutout diagram:**


[click image to enlarge](#)

