

Cabinet cooling unit KG 8505-230V



Product Features

Brand Name:	SlimLine Pro
Order Number:	850500001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12, 3, 3R, 4
Note:	pat. D815,265
Optional:	With 125 W cabinet heater order no. 850501001
Approvals:	CE, RoHS
Taric Code:	84158200

Technical data KG 8505-230V


Cooling capacity L35L35:	550W @ 50 Hz 550W @ 60 Hz
Cooling capacity L35L50:	410 W @ 50 Hz 440 W @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	98 g / 3.46 oz.
High / low pressure:	25 / 6 bar 363 / 87 psi
Temperature range:	10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 200 / 408 m ³ /h Cabinet air circuit: 122 / 180 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	370 x 520 x 155 mm
Weight:	16 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	1.8 A @ 50 Hz 1.8 A @ 60 Hz
Starting current:	6 A
Max. current:	2.5 A
Nominal power L35L35:	355 W @ 50 Hz 380 W @ 60 Hz
Max. power:	560 W
Fuse:	4.5 A (T)
Connection:	4 pole terminal block for electrical connection 5 pole terminal block for signals

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

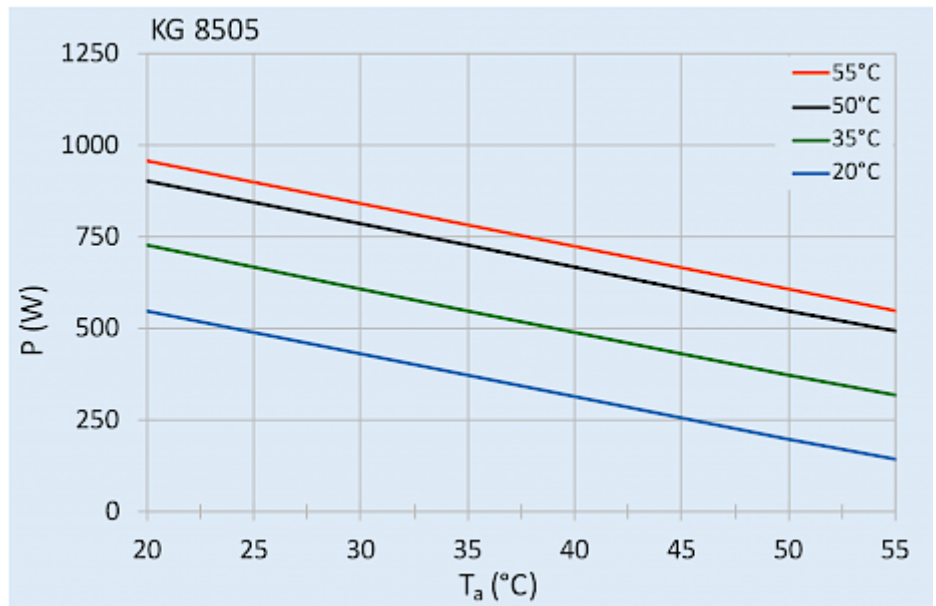


[click image to enlarge](#)

Cut out dimensions:

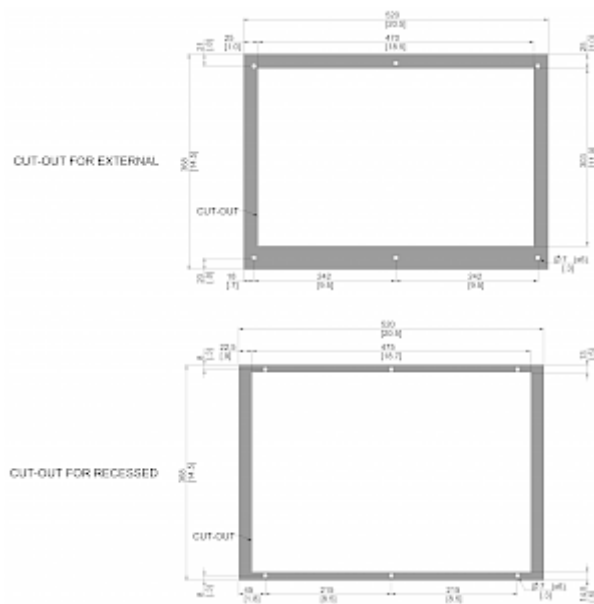

[click image to enlarge](#)

Product Accessories:

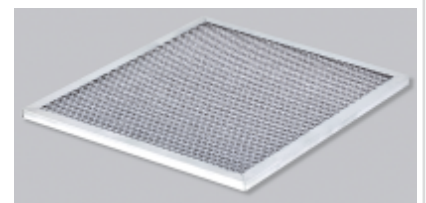

[click image to enlarge](#)