



Cabinet cooling unit KG 8515-400V



Product Features

Brand Name:	SlimLine Pro
Order Number:	851520001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12,3,3R, 4
Note:	pat. D815,265
Approvals:	CE, RoHS

Accessories:	Aluminum filter	
	Cold air outlet duct	
Taric Code:	84158200	

Technical data KG 8515-400V


Cooling capacity L35L35:	1.5 kW @ 50 Hz 1.5 kW @ 60 Hz
Cooling capacity L35L50:	1.3 kW @ 50 Hz 1.3 kW @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	295 g / 10.4 oz.
High / low pressure:	6 / 30 bar 87 / 435 psig
Temperature range:	10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 550 / 850 m ³ /h Cabinet air circuit: 500 / 850 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	1,350 x 395 x 210 mm
Weight:	44 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Current L35L35:	1.5 A
Starting current:	8.2 A
Max. current:	2.0 A
Nominal power L35L35:	710 W
Max. power:	1.2 kW
Fuse:	3.5 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

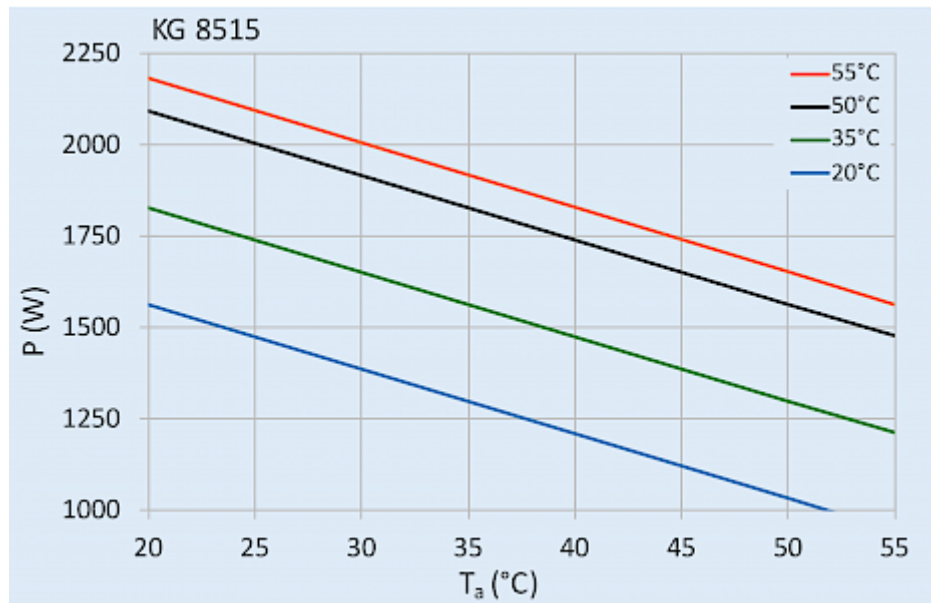


click image to enlarge

Cut out dimensions:

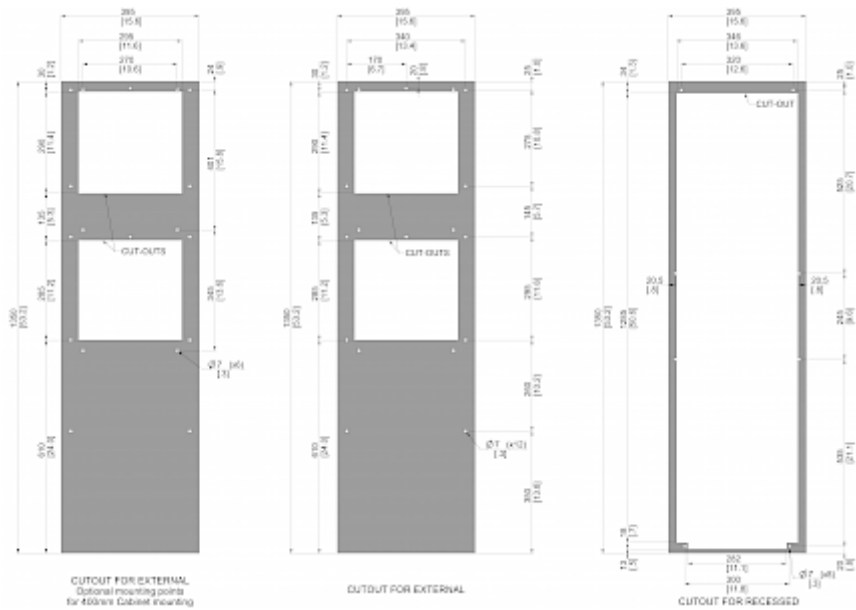

click image to enlarge

Product Accessories:

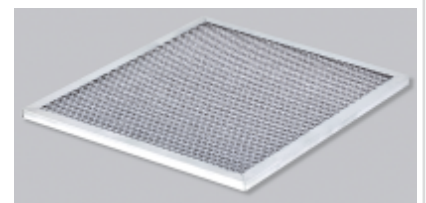

click image to enlarge