

Enclosure cooling unit



Description

Order Number:	87402584
Housing Material:	Stainless steel AISI 316 (V4A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, UL(ACVS), cULus
UL File Number:	SA32278


Technical Data

Cooling capacity L35L35:	3.9 kW @ 50 Hz 4.3 kW @ 60 Hz
Cooling capacity L35L50:	3.3 kW @ 50 Hz 3.4 kW @ 60 Hz
Enclosure heater:	2,000 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	465 g / 16.4 oz
High / low Pressure:	32 / 6 bar 460 / 88 psi
Operating Temperature Range:	-40°C - +60°C
UL temperature range:	-40°C - +60°C
Air flow volume (system / unimpeded):	Ambient air circuit: 1085 / 1480 m ³ /h Enclosure air circuit: 870 / 1480 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	1,040 x 455 x 370 mm
Weight:	65 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V / 60Hz 3~
Current L35L35:	3.6 A @ 50 Hz 4.0 A @ 60 Hz
Starting current:	19 A
Max. current:	4.8 A
Nominal power L35L35:	1.8 kW @ 50 Hz 2.4 kW @ 60 Hz
Max. power:	3.2 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA

Rated current compressor:	3.0 A
Full load current fans:	1.3 A
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

Please click on the graphics to download.
More CAD drawings can be found under [Product Download](#).
> [Overview Product Group Cooling units - PROTEC](#)

Performance graph:

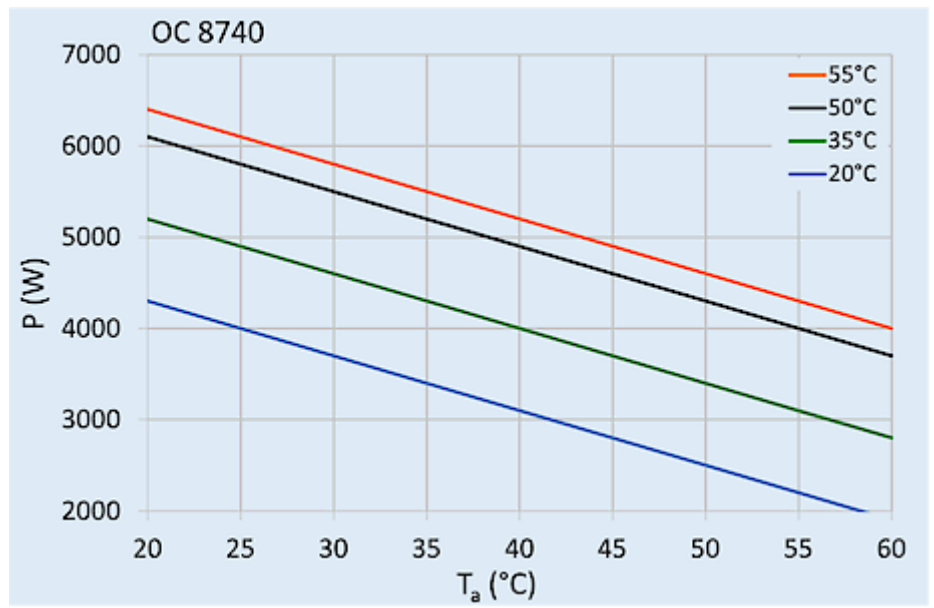

[click image to enlarge](#)

Order Information

Taric code

84158200
